

### FOR CRIMP CONTACTS/ POUR CONTACTS SERTIS

#### PRODUCT DESCRIPTION

For the economic manufacturing of flexible flat conductor cable, crimp contacts made by different manufacturers with a pitch of 1.27 mm / 2.54 mm can be used.


The contacts are available in the following versions :

- socket contact
- pin contact
- solder pin
- with tin plated or gold plated surface


#### DESCRIPTION DU PRODUIT

Solution de limande flexible avec contacts à sertir de différents fabricants avec un pas de 1.27 mm / 2.54 mm. Les contacts sont disponibles dans les versions suivantes :


- contact femelle
- contact mâle
- contact à souder
- étamés ou dorés

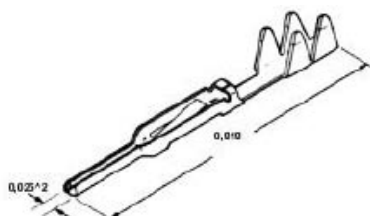


1 Pin Contact



2 Receptacle Contact



3 Pin Contact



4 Solder Tab

#### ORDERING CODE / CODIFICATION

Number of positions/  
Nombre de points  
2 - 22

Pitch/ Pas  
A = 2.54 mm  
B = 1.27 mm

Other pitches available on request/  
Autres pas disponible sur demande

**CRP-A10-P100-XXX**

Insulation material/  
Isolant  
P = Polyester  
E = PEN  
K = Polyimide

Insulation length/ Longueur isolant  
12 mm - 999 mm  
Special length/ Longueur spéciale  
up to/ jusqu'à 5000 mm

Special/ Spécial

